

雙金屬溫度計 BI-METAL DIAL THERMOMETERS



BL(T)型 BL TYPE



Note:

When ordering specify

- 1.Type No.
- 2.Case Dial.
- 3.Temperature Range.
- 4.Connection.
- 5.Stem Dial.
- 6.Stem Length.

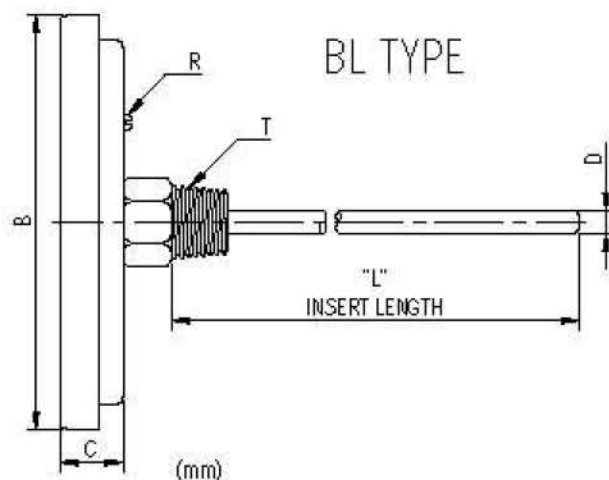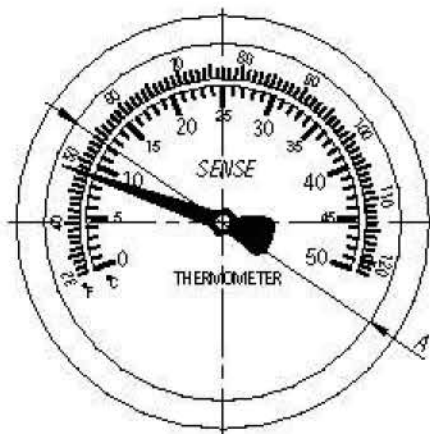

Type No. Symbol	A	B	C	D	L	T
BL2	49	58	14	6	by order	1/4"PT
BL3	70	84	17	6.35		3/8"PT
BL4	100	119	18	8		1/2"PT
BL5	125	141	18	10		3/4"PT
BL6	150	166	18	12		

Specifications.

1. Case Material: 304 、 316 s.s.
2. Case Dial: 1.5" Ø 、 2" Ø 、 2.5" Ø 、 3" Ø 、 4" Ø 、 5" Ø 、 6" Ø
3. Stem Material: 304 、 316s.s.
4. Temperature Range: -50 ~ 600°C
5. Windows: Glass.
6. Connection: 1/4"PT 、 3/8"PT 、 1/2" PT 、 3/4"PT 、 1"PT
7. Stem Length: By order.
8. Stem Dial: 6mm 、 6.35mm 、 8mm.
9. Accuracy: ± 1% F. S.,
10. Type: BL TYPE
11. Applications: Transformer 、 petrochemicals 、 driers 、
foods 、 air conditioning equip 、 boilers & other general industrial uses.

晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320

E-mail: jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>



雙金屬溫度計 BI-METAL DIAL THERMOMETERS



BS(I)型 直立型 BS TYPE



Note:

When ordering specify

- 1.Type No.
- 2.Case Dial.
- 3.Temperature Range.
- 4.Connection.
- 5.Stem Dial.
- 6.Stem Length.

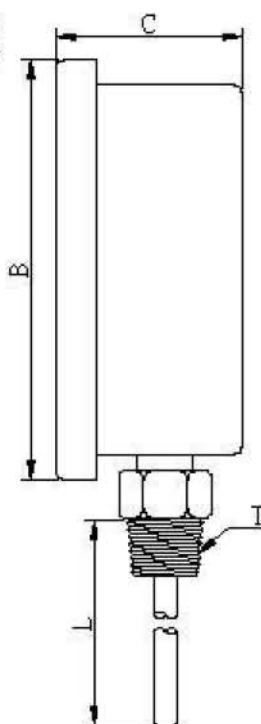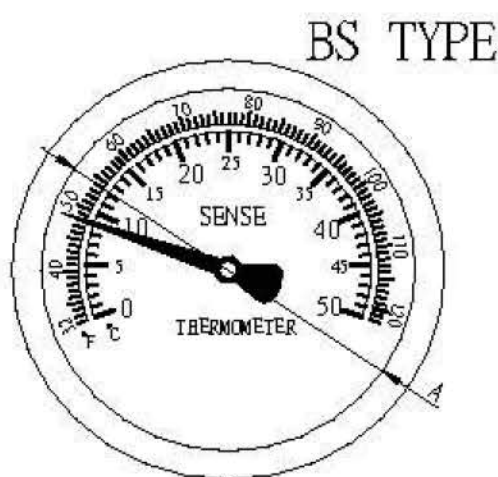

Symbol Type No.	A	B	C	T	L
BS3	70	84	45	1/2"PT	by order
BS4	102	118	48	1/2"PT	by order

Specifications.

1. Case Material: 304 、 316 s.s.
2. Case Dial: 3"φ 、 4"φ 、 6"φ
3. Stem Material: 304 、 316s.s.
4. Temperature Range: -50 ~ 600°C
5. Windows: Glass.
6. Connection: 1/4"PT 、 3/8"PT 、 1/2" PT 、 3/4"PT 、 1"PT
7. Stem Length: By order.
8. Stem Dial: 6mm 、 6.35mm 、 8mm.
9. Accuracy: $\pm 1\%$ F.S..
10. Type: BS TYPE
11. Applications: Transformer 、 petrochemicals 、 driers 、 foods 、 air conditioning equip 、 boilers & other general industrial uses.

晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320

E-mail: jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>





雙金屬溫度計 BI-METAL DIAL THERMOMETERS

BA(A)型 任意角度型 BA TYPE ADJUSTABLE ANGLE



Note:
When ordering specify
1.Type No.
2.Case Dial.
3.Temperature Range.
4.Connection.
5.Stem Dial.
6.Stem Length.

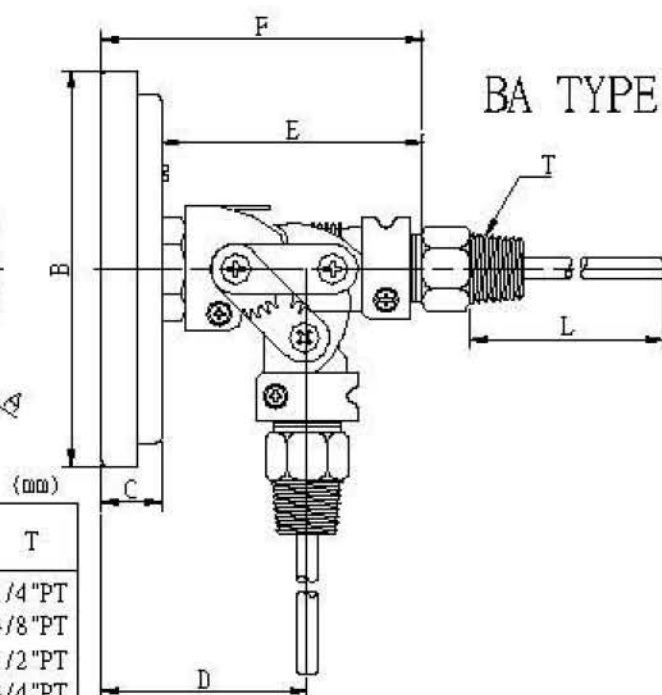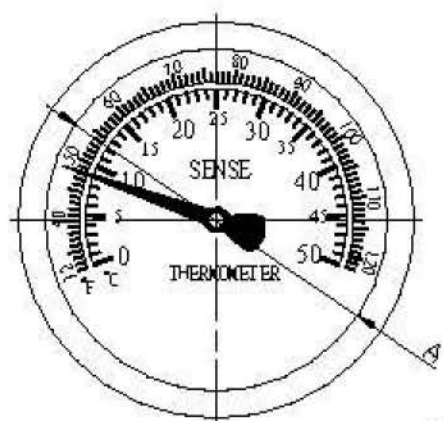

Type No. Symbol	A	B	C	D	E	F	T
BA3	75	91	18	60	75	93	1/4"PT
BA4	100	119	18	60	75	93	3/8"PT
BA5	125	141	18	60	75	93	1/2"PT
BA6	150	166	18	60	75	93	3/4"PT

Specifications.

1. Case Material: 304SS · 316SS
2. Case Dial: 3"φ · 4"φ · 5"φ · 6"φ
3. Stem Material: 316SS
4. Temperature Range: -50~600°C
5. Dial Color: Black figure on non-glaring white dial
6. Hermetic sealed case: Yes.
7. Enclosure class: IP65.
8. Windows: Safety Glass.
9. Connection: 1/2" NPT
10. Stem Length: By order.
11. Accuracy: ±1%F.S..
12. Stem Dial: 6mm · 6.35mm · 8mm.
13. Type: BA TYPE
14. Applications: Transformer · petrochemicals · driers · foods · air conditioning equip · boilers & other general industrial uses.

晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320
E-mail: jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>





L型液體膨脹式溫度計 INDUSTRIAL THERMOMETERS

HL TYPE STAINLESS STEEL CASE



Note:
When ordering specify
1.Type No.
2.Case Dial.
3.Temperature Range.
4.Connection.
5.Stem Length.

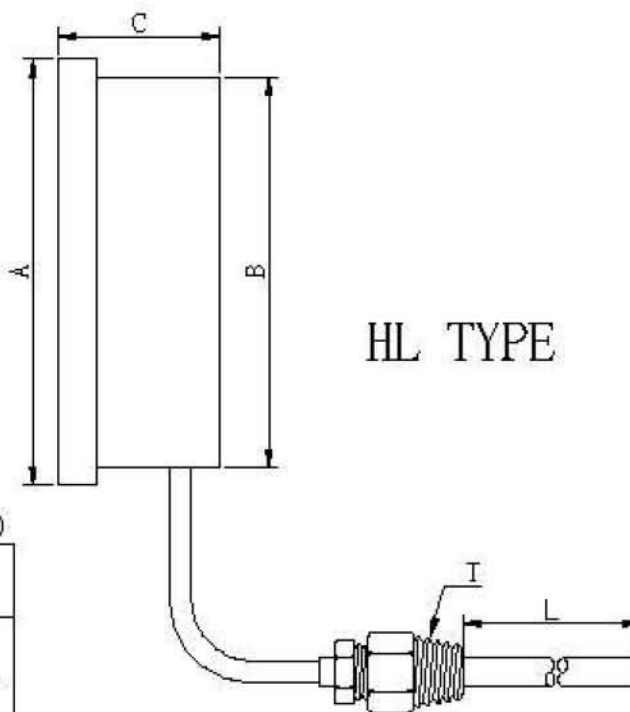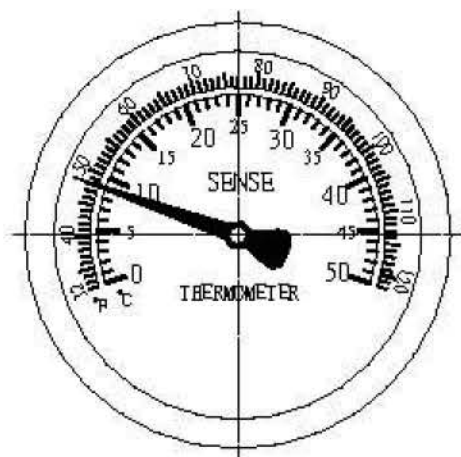

(mm)

Type No.	A	B	C	I	L
HS3	84	75	47	1/2"	By order
HS4	118	108	45	3/4"	
HS6	160	148	45		

Specifications.

- 1.Case Material: STAINLESS STEEL #304、#316
- 2.Case Length: 3"、4"、6"
- 3.Stem Material: STAINLESS STEEL #304、#316
- 4.Temperature Range: -50~600°C
- 5.Lens: Glass.
- 6.Connection: 1/4"PT、3/8"PT、1/2"PT、3/4"PT、1"PT(NPT、BSP)
- 7.Stem Length: By order.
- 8.Accuracy: $\pm 1\%F.S.$
- 9.Type: HL TYPE
- 10.Options: Special range, connections, lens and stem length.

晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320
E-mail: jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>



直結型 液體膨脹式 溫度計 (附電氣接點)

HT-1A、2A TYPE STAINLESS STEEL CASE INDUSTRIAL THERMOMETERS




Note:

When ordering specify

- 1.Type No.
- 2.Case Dial.
- 3.Temperature Range.
- 4.Connection.
- 5.Stem Length.
- 6.Stem Dial.
- 7.Contact Type.

HT-2A TYPE

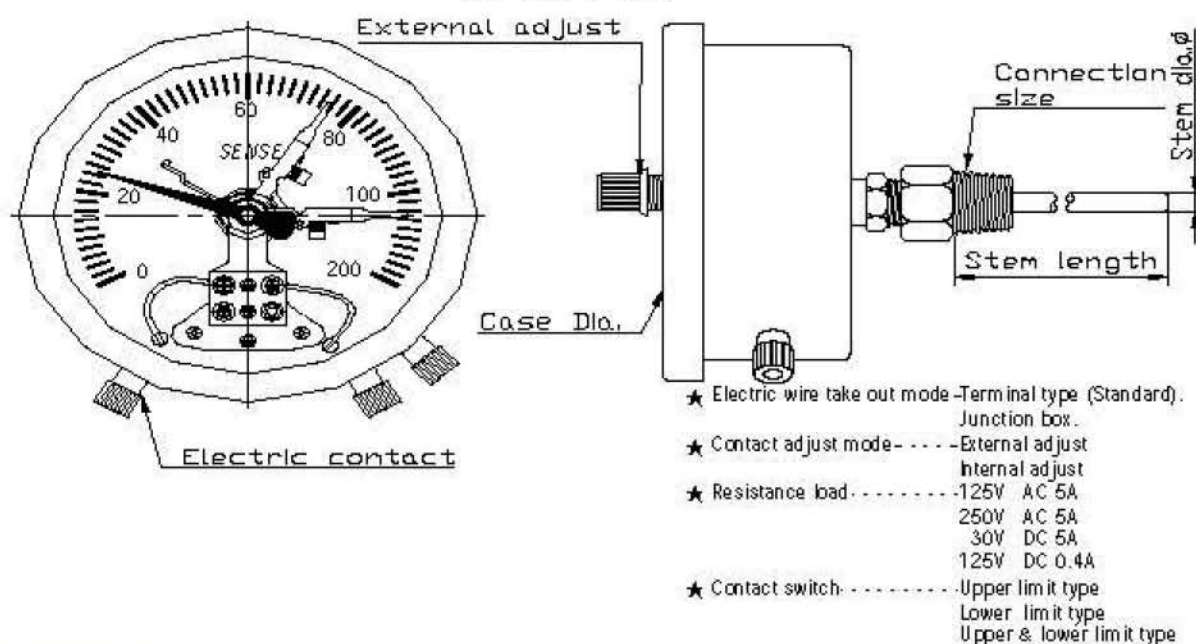

Specifications.

- 1.Case Material: STAINLESS STEEL #304、#316
- 2.Case Dia: 3"、4"
- 3.Stem Material: STAINLESS STEEL #304、#316
- 4.Temperature Range: -50~600°C
- 5.Lens:Glass.
- 6.Connection:1/4"PT、3/8"PT、1/2"PT、3/4"PT、1"PT(NPT、BSP)
- 7.Stem Length:By order.
- 8.Accuracy: ±1%F.S.
- 9.Type:HT-1A、2A TYPE
- 10.Options:Special range, connections,lens and stem length.

晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320

E-mail:jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>




直結型 液體膨脹式 溫度計 (附電氣接點)

HS-1A、2A TYPE STAINLESS STEEL CASE INDUSTRIAL THERMOMETERS



Note:
When ordering specify
1.Type No.
2.Case Dial.
3.Temperature Range.
4.Connection.
5.Stem Length.
6.Stem Dial.
7.Contact Type.

HS-2A TYPE

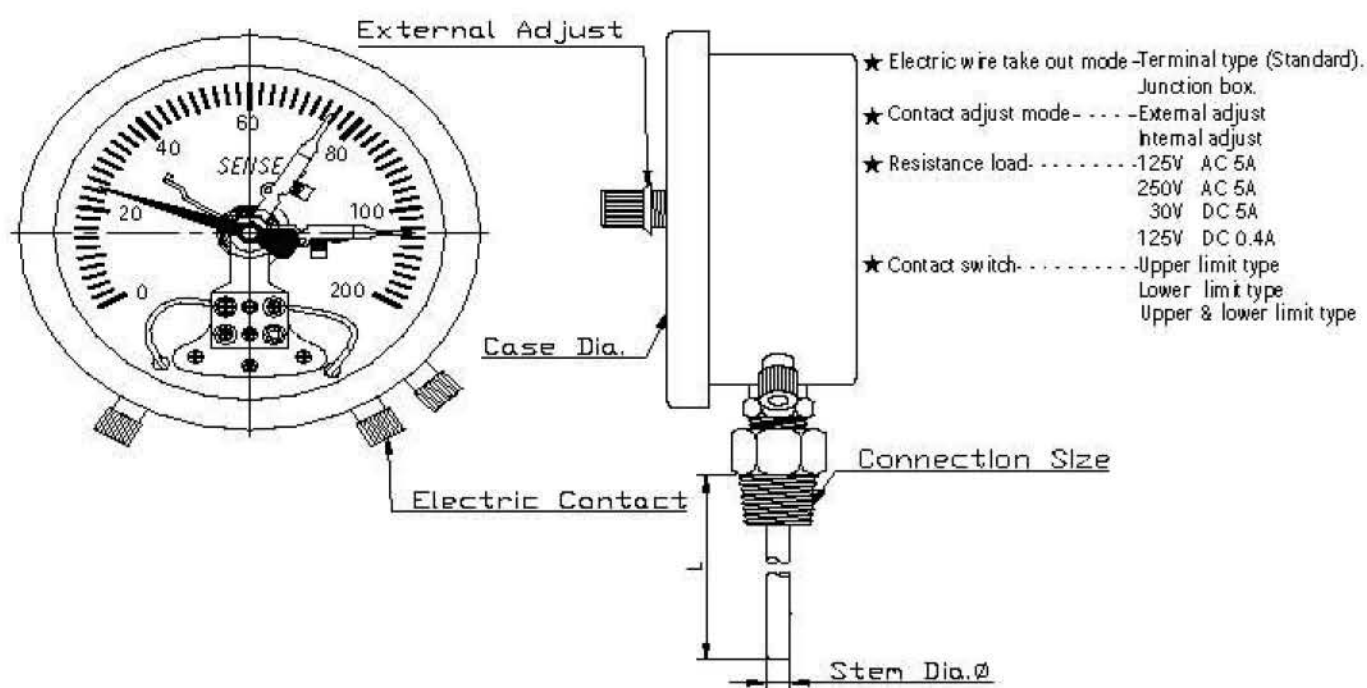

Specifications.

- 1.Case Material: STAINLESS STEEL #304、#316
- 2.Case Dia: 3"、4"
- 3.Stem Material: STAINLESS STEEL #304、#316
- 4.Temperature Range: -50~600°C
- 5.Lens: Glass.
- 6.Connection: 1/4" PT、3/8" PT、1/2" PT、3/4" PT、1" PT (NPT、BSP)
- 7.Stem Length: By order.
- 8.Accuracy: $\pm 1\% F.S.$
- 9.Type: HS-1A、2A TYPE
- 10.Options: Special range, connections, lens and stem length.

晟品科技有限公司

20543 基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320

E-mail: jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>




隔測壁掛式溫度計 LIQUID-FILLED THERMOMETERS

MW TYPE REMOTE READING



Note:
When ordering specify
1.Type No.
2.Case Dial.
3.Temperature Range.
4.Capillary Length
5.Connection.
6.Stem Dial.
7.Stem Length.

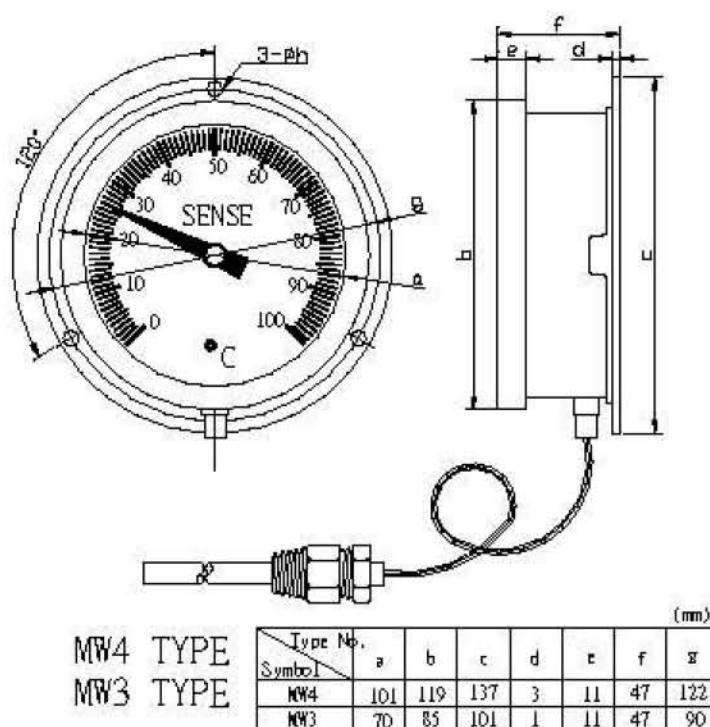

Specifications.

- 1.Case Material:304、316s.s.
- 2.Case Dial:3"φ、4"φ、6"φ
- 3.Stem Material:304、316s.s.
- 4.Temperature Range:-50~600°C
- 5.Capillary Length:STD 3M.
- 6.Windows:Glass.
- 7.Connection:1/4"PT、3/8"PT、1/2"PT、3/4"PT、1"PT(NPT、BSP)
- 8.Stem Length:By order.
- 9.Accuracy:±1%F.S.
- 10.Type:MW3、MW4、MW6TYPE
- 11.Appliactions:Transformer、petrochemicals、driers、foods、air conditioning equip、boilers & other general industrial uses.

晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320
E-mail:jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>




隔測埋入式溫度計 LIQUID-FILLED THERMOMETERS

MF TYPE REMOTE READING



Note:
When ordering specify
1.Type No.
2.Case Dial.
3.Temperature Range.
4.Capillary Length
5.Connection.
6.Stem Dial.
7.Stem Length.

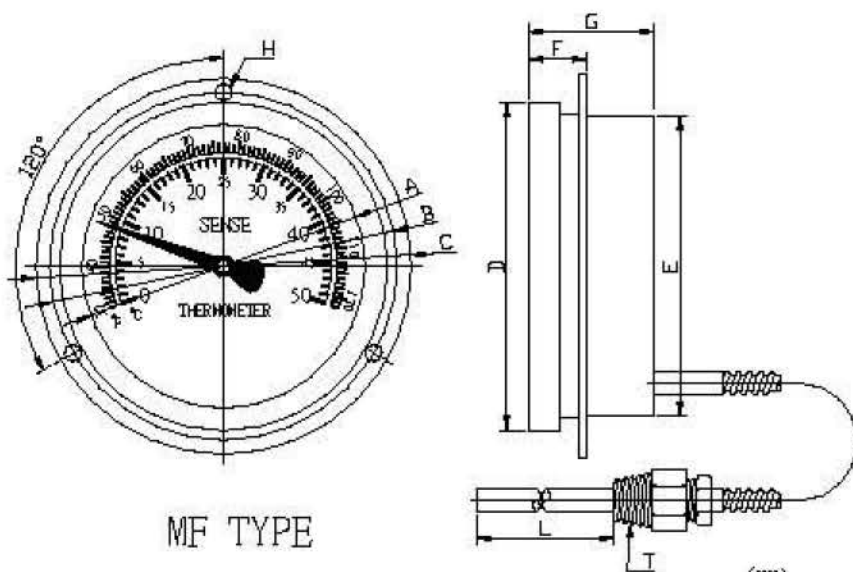

MF TYPE

Type No. Symbol	A	B	C	D	E	F	G	H	I	L
MF3	70	90	100	84	75	16	47	6	1/2"	By order
MF4	102	124	139	118	108	22	45	6	3/4"	
MF5	140	178	196	160	148	18	45	6		

(mm)

Specifications.

- 1.Case Material:304 、 316 s.s.
- 2.Case Dial: 3" $\varnothing$ 、 4" $\varnothing$ 、 6" $\varnothing$
- 3.Stem Material:304 、 316 s.s.
- 4.Temperature Range: -50 ~ 600°C
- 5.Windows: Glass.
- 6.Capillary Length: STD 3M.
- 7.Connection: 1/4" PT 、 3/8" PT 、 1/2" PT 、 3/4" PT 、 1" PT (NPT 、 BSP)
- 8.Stem Length: By order.
- 9.Accuracy: $\pm 1\%$ F.S.
- 10.Type: MF3 、 MF4 、 MF6 TYPE
- 11.Applications: Transformer 、 petrochemicals 、 driers 、 foods 、 air conditioning equip 、 boilers & other general industrial uses.

晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320
E-mail: jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>



隔測壁掛式溫度計(附接點) LIQUID-FILLED THERMOMETERS


MW-1A、2A型 MW-1A、2A TYPE REMOTE READING



Note:

When ordering specify

- 1.Type No.
- 2.Case Dial.
- 3.Temperature Range.
- 4.Capillary Length
- 5.Connection.
- 6.Stem Dial.
- 7.Stem Length.

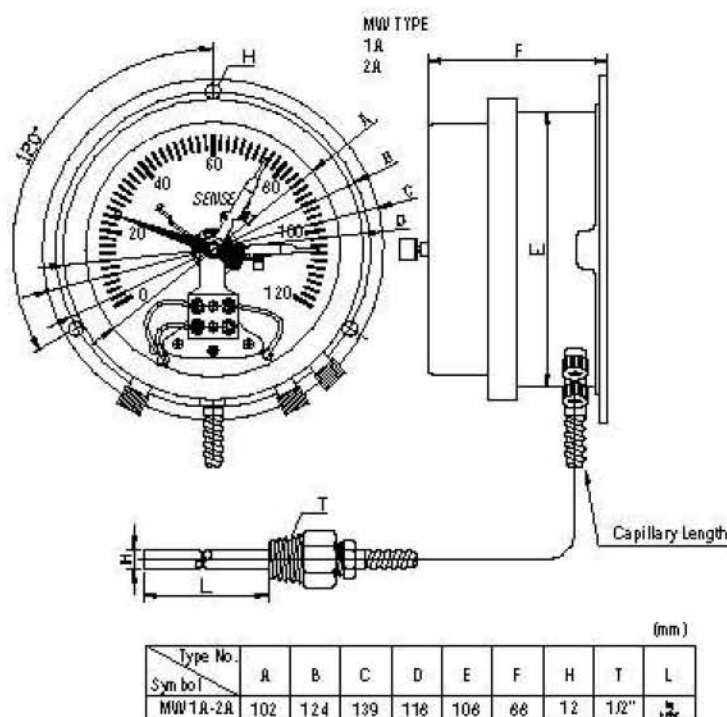

Specifications.


- 1.Case Material:304、316 s.s.
- 2.Case Dial:3"、4"、6"
- 3.Stem Material:304、316s.s.
- 4.Temperature Range:-50~600℃
- 5.Windows:Glass.
- 6.Capillary Length:STD 3M.
- 7.Connection:1/4"PT、3/8"PT、1/2" PT、3/4"PT、1"PT(NPT、BSP)
- 8.Stem Length:By order.
- 9.Accuracy:±1°F.S..
- 10.Type:MW-1A、MW-2A TYPE
- 11.Appliactions:Transformer、petrochemicals、driers、foods、air conditioning equip、boilers & other general industrial uses.

晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320

E-mail:jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>




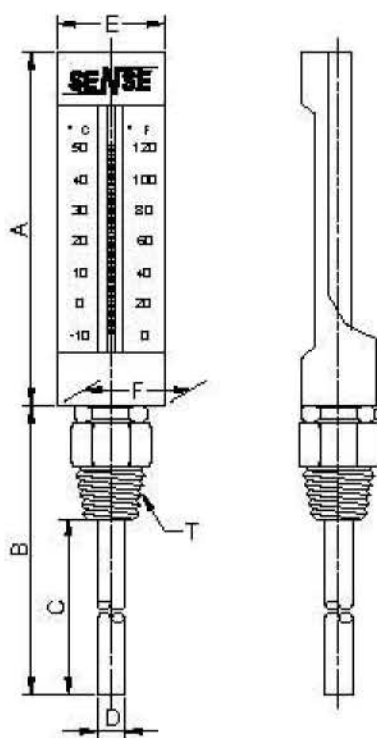


AS TYPE

(mm)

Type No. Symbol	A	B	C	D	E	F	T
AS 4.5	110	82	49	10	32	32	1/2" 3/4"
AS 6	150	82	49	10	35	35	1/2" 3/4"
AS 8	199	82	49	10	35	35	1/2" 3/4"

AL TYPE

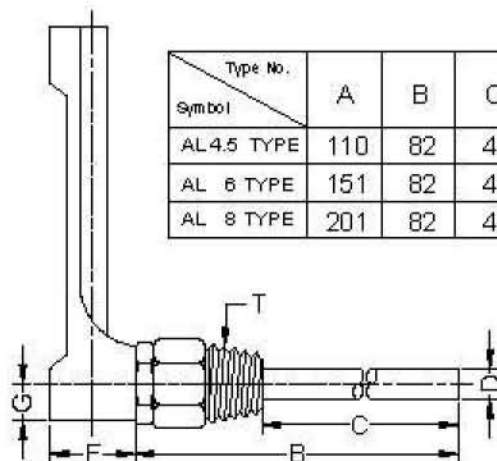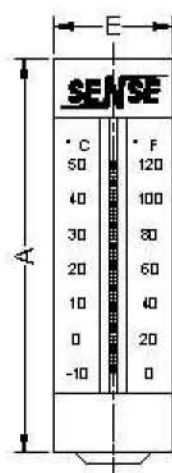

(mm)

Type No. Symbol	A	B	C	D	E	F	G	T
AL 4.5 TYPE	110	82	49	10	35	29	14	1/2" 3/4"
AL 6 TYPE	151	82	49	10	35	29	11	1/2" 3/4"
AL 8 TYPE	201	82	49	10	35	29	14	1/2" 3/4"

SPECIFICATIONS:

1. SCALE LENGTH: 4 1/2" (110mm), 6" (150mm), 8" (200mm)
2. TEMP. RANGE: -30 ~ 600 °C / °F
3. CASE: Oxidized aluminum alloy.
4. LENS: Glass.
5. CONNECTION: 1/2" NPT/BSP
Straight or angle form
6. TUBE: Glass tube, magnifying red or blue liquid
7. OTHER OPTION UPON REQUEST



晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320

E-mail: jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>




工業用 角板型溫度計 INDUSTRIAL THERMOMETERS

TL型 TL TYPE GLASS TUBE-PLASTIC CASE.



Note:
When ordering specify
1.Type No.
2.Case Length
3.Temperature Range.
4.Connection.
5.Stem Length.

TL TYPE

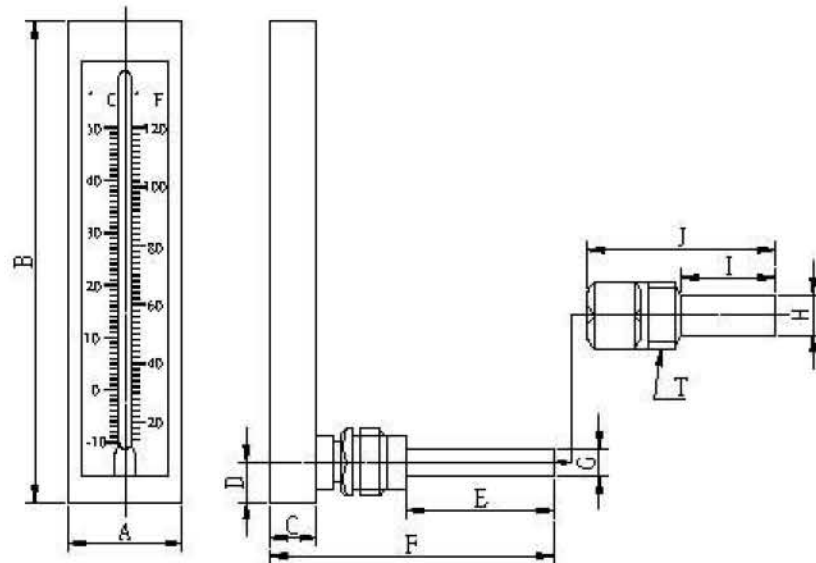

(mm)

Type No. Symbol	A	B	C	D	E	F	G	H	I	J	T
TL TYPE	38	164	17	12	50	93	10	13	32	64	1/2"

Specifications.

- 1.Case Material:Plastic Lens:Glass.
- 2.Scale Length:4 1/2"(110mm) · 6"(150mm) · 8"(200mm).
- 3.Stem Material:Brass · #316ss · electroplate
- 4.Temperature Range:-10~110°F · -20~120°F · 0~160°F · 30~240°F · 50~400°F
-40~50°C · -20~45°C · 0~80°C · 0~160°C · 0~200°C
-40~110°F & °C · -5~50°F & °C · 0~120°F & °C · 0~150°F & °C · 30~240°F & °C
- 5.Tube:Glass tube · magnifying red or blue liquid.
- 6.Connection:1/2" NPT(NPT · BSP)
- 7.Stem Length:By order.
- 8.Accuracy: ± 1%F.S..
- 9.Type:TS TYPE
- 10.Options:Special range, connections, lens and stem length.

晟品科技有限公司


20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320
E-mail:jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>



工業用 角板型溫度計 INDUSTRIAL THERMOMETERS TS型 TS TYPE GLASS TUBE-PLASTIC CASE.



Note:
When ordering specify
1.Type No.
2.Case Length
3.Temperature Range.
4.Connection.
5.Stem Length.

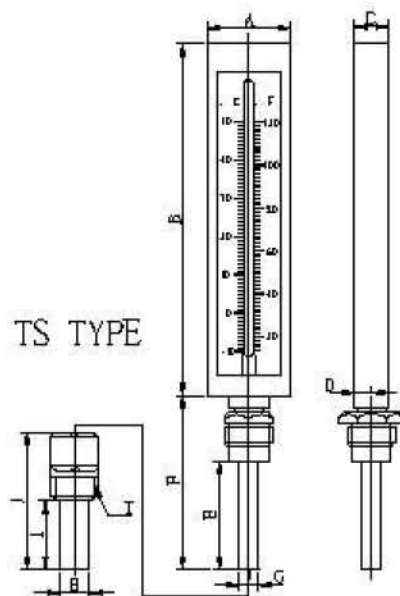

Type No. Symbol	A	B	C	D	E	F	G	H	I	J	K
TS TYPE	38	164	17	10	50	76	10	13	32	64	1/2"

Specifications.

- 1.Case Material:Plastic
- 2.Scale Length:4 1/2"(110mm) · 6"(150mm) · 8"(200mm).
- 3.Stem Material:Brass · #316ss · electroplate
- 4.Temperature Range: -10~110°F · -20~120°F · 0~160°F · 30~240°F · 50~400°F
-40~50°C · -20~45°C · 0~80°C · 0~160°C · 0~200°C
-40~110°F & °C · -5~50°F & °C · 0~120°F & °C · 0~150°F & °C · 30~240°F & °C
- 5.Lens:Glass.
- 6.Tube:Glass tube · magnifying red or blue liquid.
- 7.Connection:1/2" NPT(NPT · BSP)
- 8.Stem Length:By order.
- 9.Accuracy: ± 1%F.S..
- 10.Type:TS TYPE
- 11.Options:Special range, connections,lens and stem length.

晟品科技有限公司


20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320

E-mail:jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>




工業用圓筒型溫度計 INDUSTRIAL THERMOMETERS

GS、GL型 GS、GL TYPE PLATED BRASS CASE

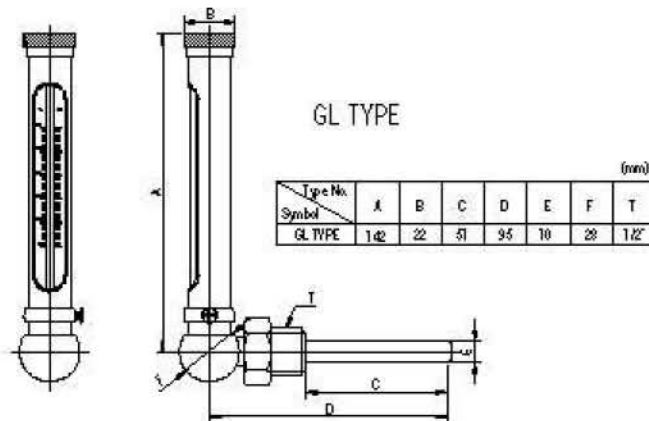

GS TYPE

Type No. Symbol	A	B	C	D	T
GS TYPE	150	22	28	10	112"

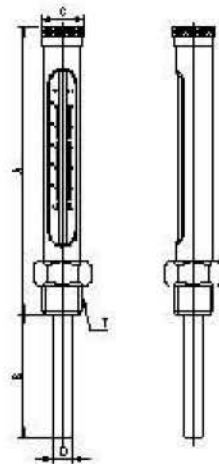

Note:
 When ordering specify
 1.Type No.
 2.Case Length
 3.Temperature Range.
 4.Connection.
 5.Stem Length.

Specifications.

- 1.Case Material:Plated brass case.
- 2.Case Length:4 1/2"(110mm) 、6"(150mm) 、8"(200mm).
- 3.Stem Material:Brass 、#316ss 、electroplate
- 4.Temperature Range:-50~600°C
- 5.Lens:Glass.
- 6.Tube:Glass tube 、magnifying red or blue liquid.
- 7.Connection:1/4"PT 、3/8"PT 、1/2" PT 、3/4"PT 、 1"PT(NPT 、BSP)
- 8.Stem Length:By order.
- 9.Accuracy: ±1%F.S..
- 10.Type:GS TYPE 、GL TYPE
- 11.Options:Special range, connections,lens and stem length.


晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320
 E-mail:jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>



LCD-display Digital Thermometer

LCD series

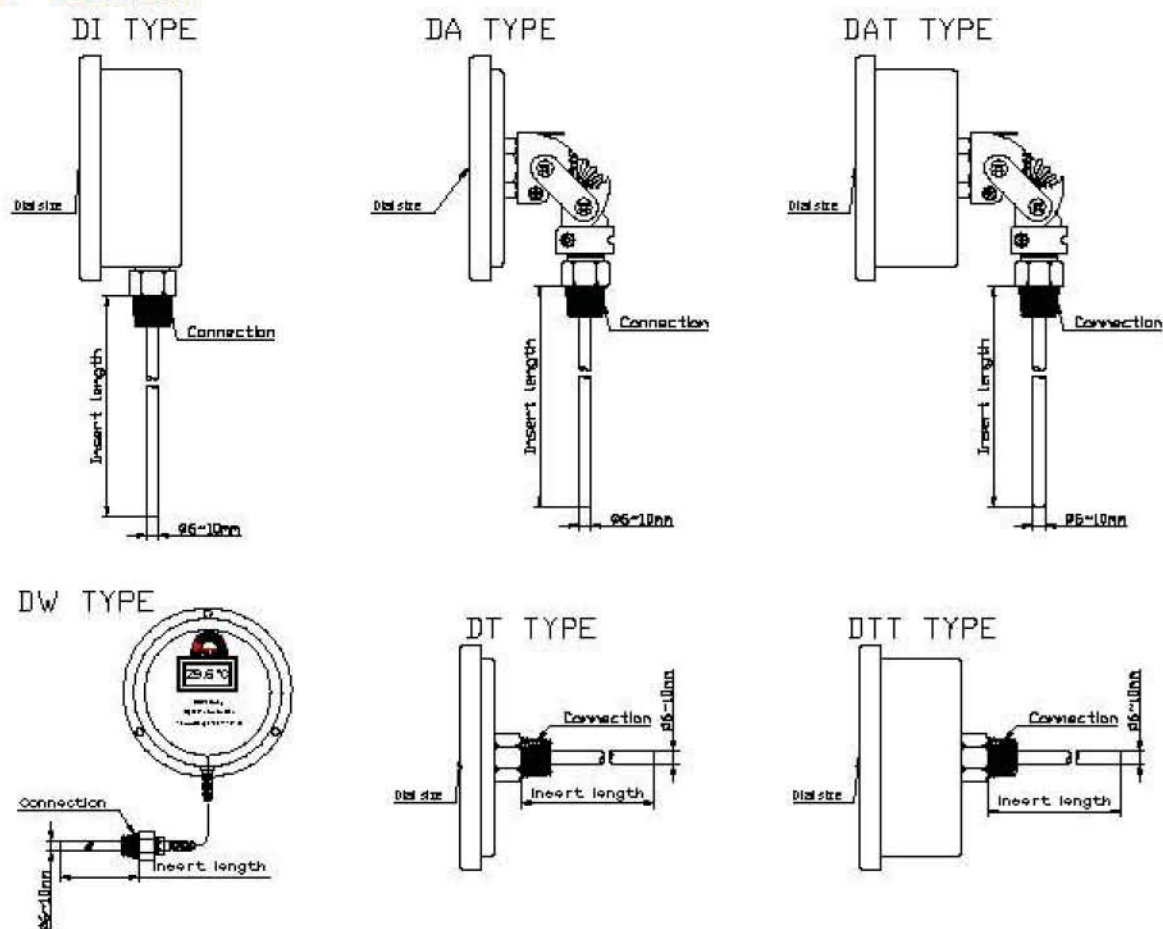

Specifications.

15. Models:DT、DTT、DI、DA、DAT Type
16. Case Material:304SS、316SS
17. Case Dial: 3"Ø、4"Ø
18. Stem Material:316SS
19. Temperature Range:-50~150°C
20. Ambient temperature:60°C
21. Enclosure class:Weather Proof
22. Connection:1/2" NPT
23. Stem Length:By order.
24. Accuracy:±0.5%F.S.(linear deviation: ±1%of F.S.)
25. Stem Dial:6.35~10mm



晟品科技有限公司

20543基隆市暖暖區源遠路76-1號 TEL: (02) 2459-3310 FAX: (02) 2459-3320

E-mail:jimmy.chenpin@gmail.com Website: <http://www.tempsensor.com.tw>

